



Filochrome plated

Chrome plated steel towel warmer radiator

FILO is a towel warmer with unmistakable lines, thanks to the combination of extremely well proportioned steel elements. The lightness of the lines and the reflections is strongly expressed in the Chrome Plated version.

Filochrome plated


Chrome plated steel towel warmer radiator

Technical features:

- steel towel warmer radiator with horizontal elements featuring round tubes 12 mm diameter
- side manifolds with a 45x30 mm ovoid section
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Standard supply:

- 4 chrome plated wall brackets
- chrome plated air vent

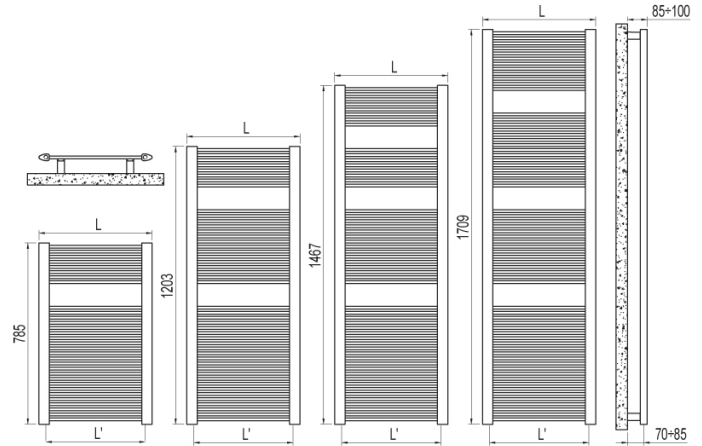

785 - 31 rails - 1 espace	FIP046	50	30	785	466	406	6.05	2.19	241	182	127	77	1.252	
785 - 31 rails - 1 espace	FIP051	50	30	785	516	456	6.54	2.30	268	202	141	85	1.252	300
785 - 31 rails - 1 espace	FIP061	50	30	785	616	556	7.54	2.53	321	243	169	102	1.252	300
1203 - 46 rails - 2 espaces	FIM046	50	30	1203	466	406	9.04	3.32	364	274	190	113	1.273	400
1203 - 46 rails - 2 espaces	FIM051	50	30	1203	516	456	9.78	3.49	404	304	211	126	1.273	400
1203 - 46 rails - 2 espaces	FIM061	50	30	1203	616	556	11.25	3.82	484	365	253	151	1.273	400
1467 - 54 rails - 3 espaces	FIS046G	50	30	1467	466	406	10.75	3.99	437	329	228	136	1.273	400
1467 - 54 rails - 3 espaces	FIS051G	50	30	1467	516	456	11.62	4.19	485	365	253	151	1.273	400
1467 - 54 rails - 3 espaces	FIS061G	50	30	1467	616	556	13.34	4.58	578	435	302	180	1.273	400
1709 - 65 rails - 3 espaces	FIS046	50	30	1709	466	406	12.76	4.71	528	395	272	160	1.299	400
1709 - 65 rails - 3 espaces	FIS051	50	30	1709	516	456	13.80	4.95	586	438	302	178	1.299	400
1709 - 65 rails - 3 espaces	FIS061	50	30	1709	616	556	15.88	5.42	702	526	362	214	1.299	700
785 - 31 rails - 1 espace	FIP046	50	30	785	466	406	6.05	2.19	241	182	127	77	1.252	
785 - 31 rails - 1 espace	FIP051	50	30	785	516	456	6.54	2.30	268	202	141	85	1.252	300
785 - 31 rails - 1 espace	FIP061	50	30	785	616	556	7.54	2.53	321	243	169	102	1.252	300
1203 - 46 rails - 2 espaces	FIM046	50	30	1203	466	406	9.04	3.32	364	274	190	113	1.273	400
1203 - 46 rails - 2 espaces	FIM051	50	30	1203	516	456	9.78	3.49	404	304	211	126	1.273	400
1203 - 46 rails - 2 espaces	FIM061	50	30	1203	616	556	11.25	3.82	484	365	253	151	1.273	400
1467 - 54 rails - 3 espaces	FIS046G	50	30	1467	466	406	10.75	3.99	437	329	228	136	1.273	400
1467 - 54 rails - 3 espaces	FIS051G	50	30	1467	516	456	11.62	4.19	485	365	253	151	1.273	400
1467 - 54 rails - 3 espaces	FIS061G	50	30	1467	616	556	13.34	4.58	578	435	302	180	1.273	400
1709 - 65 rails - 3 espaces	FIS046	50	30	1709	466	406	12.76	4.71	528	395	272	160	1.299	400
1709 - 65 rails - 3 espaces	FIS051	50	30	1709	516	456	13.80	4.95	586	438	302	178	1.299	400
1709 - 65 rails - 3 espaces	FIS061	50	30	1709	616	556	15.88	5.42	702	526	362	214	1.299	700

50 = Chrome colour code.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$