



Net

Steel towel warmer radiator


Net changes the geometry of the profile of horizontal tubes. Its rectangular shape gives this towel warmer a pronounced personality that enhances the bathroom environment.

Technical features:

- steel towel warmer radiator with horizontal elements featuring rectangular tubes 20x25 mm section
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Standard supply:

- 4 adjustable wall fixing brackets in the same color as the radiator
- air vent

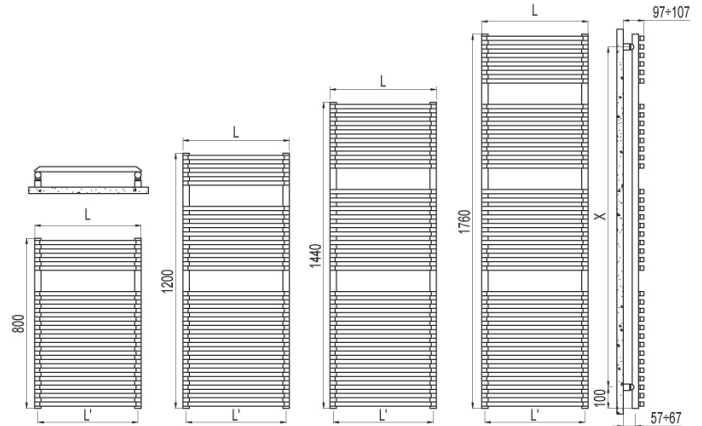

800 - 18 rails - 1 espace	N X S050 01	55	800	500	470	7.72	4.60	454	349	248	154	1.184	400
800 - 18 rails - 1 espace	N X S060 01	55	800	600	570	8.98	5.33	530	408	291	180	1.177	400
800 - 18 rails - 1 espace	N X S075 01	55	800	750	720	10.87	6.42	642	495	354	221	1.165	700
1200 - 26 rails - 2 espaces	M050 01	55	1200	500	470	11.20	6.70	648	495	350	215	1.203	700
1200 - 26 rails - 2 espaces	M060 01	55	1200	600	570	13.02	7.75	750	575	408	252	1.190	700
1200 - 26 rails - 2 espaces	M075 01	55	1200	750	720	15.75	9.33	903	695	497	309	1.169	1000
1440 - 32 rails - 2 espaces	L050 01	55	1440	500	470	13.71	8.20	813	620	437	267	1.216	700
1440 - 32 rails - 2 espaces	L060 01	55	1440	600	570	15.95	9.50	951	727	515	316	1.202	1000
1440 - 32 rails - 2 espaces	L075 01	55	1440	750	720	19.31	11.44	1157	889	633	392	1.182	1000
1760 - 38 rails - 3 espaces	E050 01	55	1760	500	470	16.35	9.80	964	735	518	317	1.215	1000
1760 - 38 rails - 3 espaces	E060 01	55	1760	600	570	19.01	11.34	1112	850	601	369	1.204	1000
1760 - 38 rails - 3 espaces	E075 01	55	1760	750	720	23.00	13.65	1336	1025	728	450	1.187	1000
800 - 18 rails - 1 espace	N X S050 01	55	800	500	470	7.72	4.60	454	349	248	154	1.184	400
800 - 18 rails - 1 espace	N X S060 01	55	800	600	570	8.98	5.33	530	408	291	180	1.177	400
800 - 18 rails - 1 espace	N X S075 01	55	800	750	720	10.87	6.42	642	495	354	221	1.165	700
1200 - 26 rails - 2 espaces	M050 01	55	1200	500	470	11.20	6.70	648	495	350	215	1.203	700
1200 - 26 rails - 2 espaces	M060 01	55	1200	600	570	13.02	7.75	750	575	408	252	1.190	700
1200 - 26 rails - 2 espaces	M075 01	55	1200	750	720	15.75	9.33	903	695	497	309	1.169	1000
1440 - 32 rails - 2 espaces	L050 01	55	1440	500	470	13.71	8.20	813	620	437	267	1.216	700
1440 - 32 rails - 2 espaces	L060 01	55	1440	600	570	15.95	9.50	951	727	515	316	1.202	1000
1440 - 32 rails - 2 espaces	L075 01	55	1440	750	720	19.31	11.44	1157	889	633	392	1.182	1000
1760 - 38 rails - 3 espaces	E050 01	55	1760	500	470	16.35	9.80	964	735	518	317	1.215	1000
1760 - 38 rails - 3 espaces	E060 01	55	1760	600	570	19.01	11.34	1112	850	601	369	1.204	1000
1760 - 38 rails - 3 espaces	E075 01	55	1760	750	720	23.00	13.65	1336	1025	728	450	1.187	1000

X = C for connections at either end of the radiator; H for 50 mm connections; 01 = Standard White colour code - for different colour codes see the colours page.

For t different from 50°C use the formula: $Q=Q_n (t / 50)^n$